




Knock-Off Valve Pneumatic 30 mm

GKV-03B

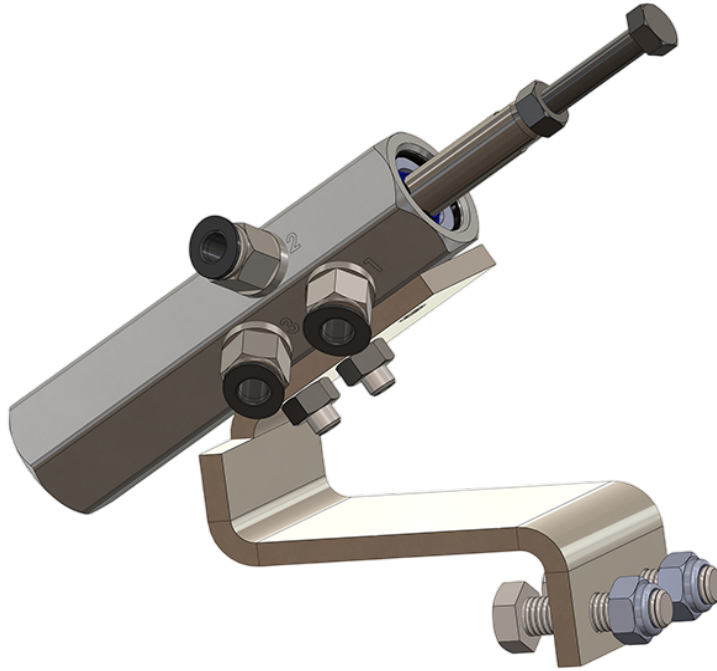

VALVES
VENTİLLER

HYDRAULIC EQUIPMENT
HİDROLİK EKİPMANLAR

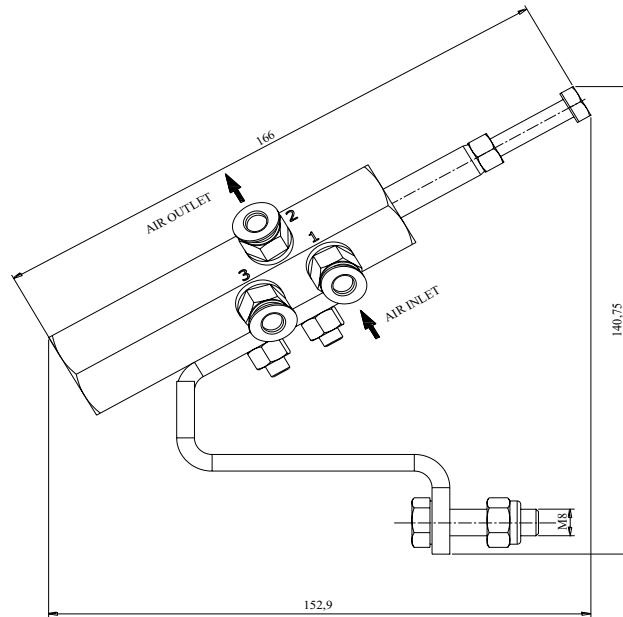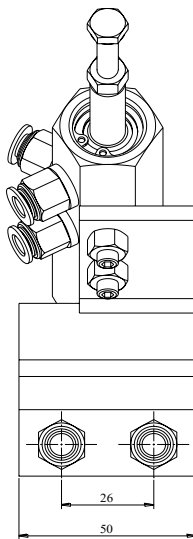


SPECIFICATIONS

Air inlet 1-3	G 1/8"
Air outlet 2	G 1/8"
Max.air pressure	12 bar
Air temperature range	-20 & 80 °C
Weight	0,3kg





200 Lt End-Of-Stroke Valve RUNSTOP

GKV-06B

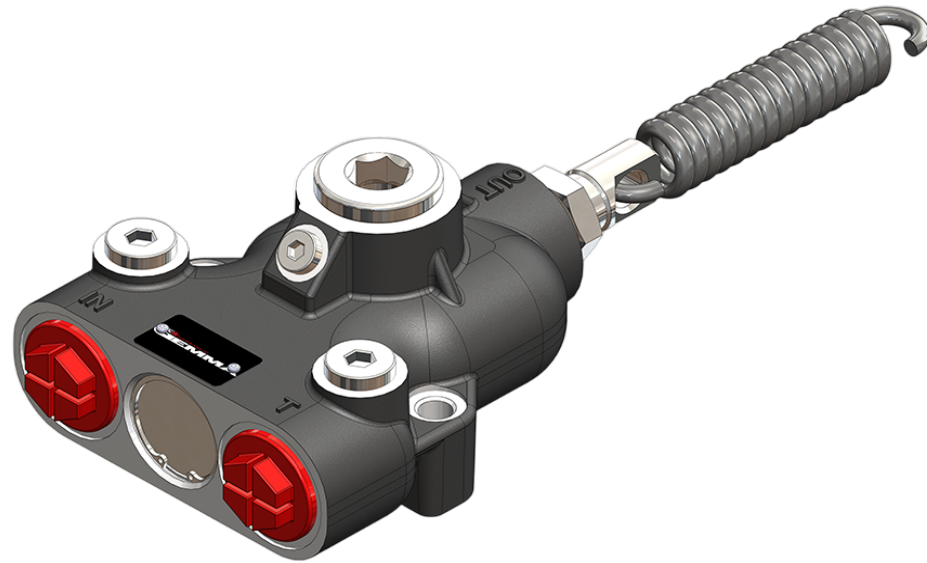

140 Lt Trailer Type Directional Valve


36001040

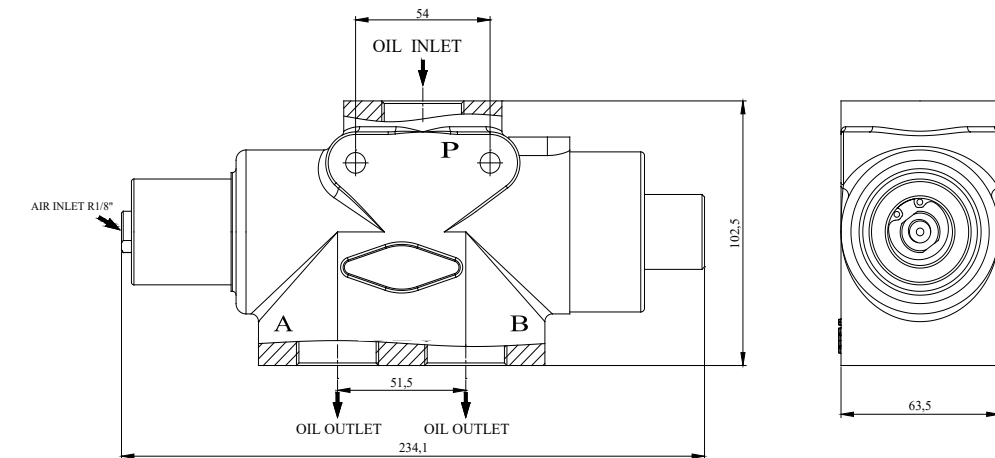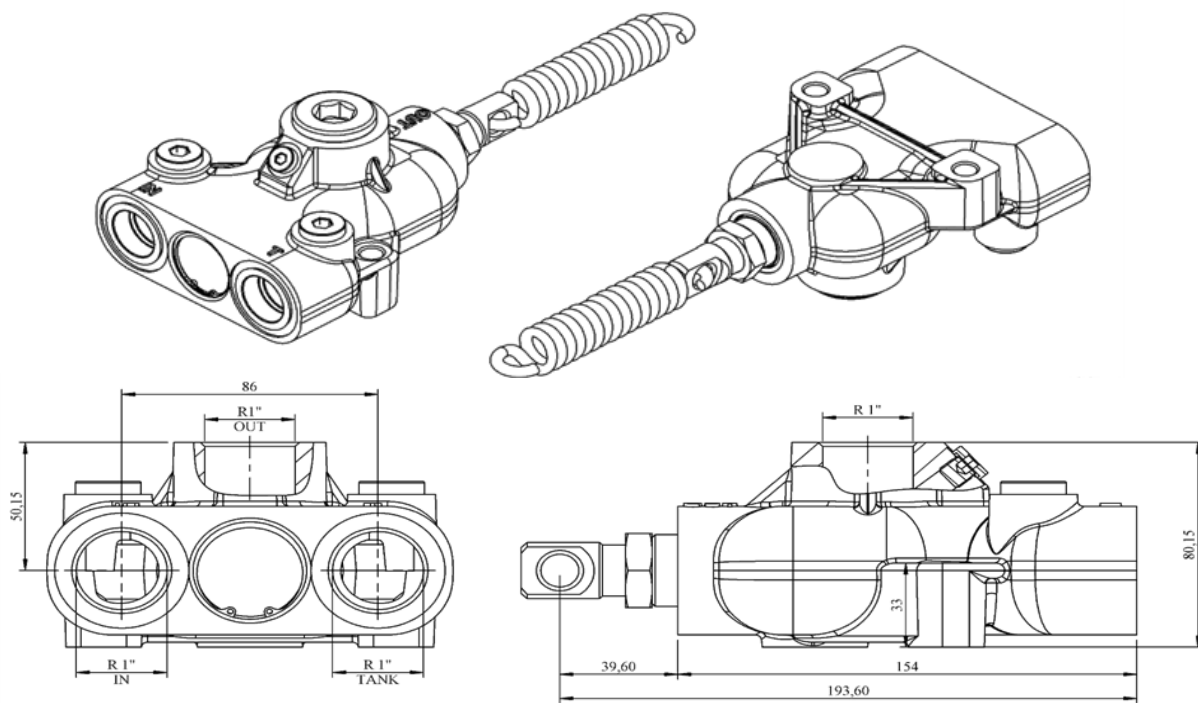

SPECIFICATIONS

Pump Connection	R 1"
1. Cylinder Connection	R 1"
2. Cylinder Connection	R 1"
Working Pressure	300 bar
Max. Intermittent Pressure	330 bar
Max. Peak Pressure	400 bar
Max. Flow	200 l/min
Oil Temperature Range	-20 & 80 °C
Weight	5,1 kg

FUNCTIONAL DIAGRAM

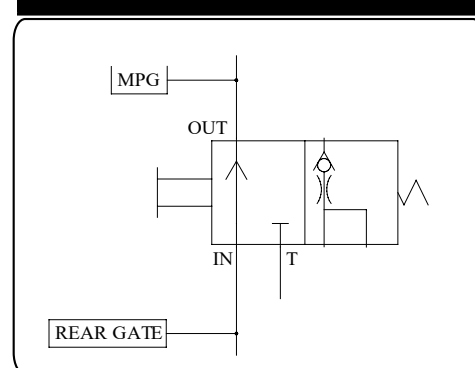


SPECIFICATIONS

Pump Connection	R 1"
1. Cylinder Connection	R 1"
2. Cylinder Connection	R 1"
Max. Working Pressure	190 bar
Max. Flow	140 L/dak
Oil temperature range	-20 & 80 °C
Weight	2,5kg




250 Lt Diverter Valve High Pressure 3-Way 2-Position

36001070

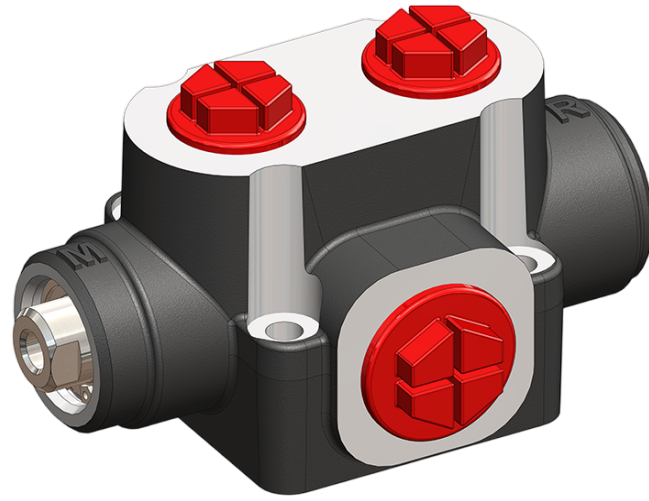


VALVES
VENTİLLER

HYDRAULIC EQUIPMENT
HİDROLİK EKİPMANLAR

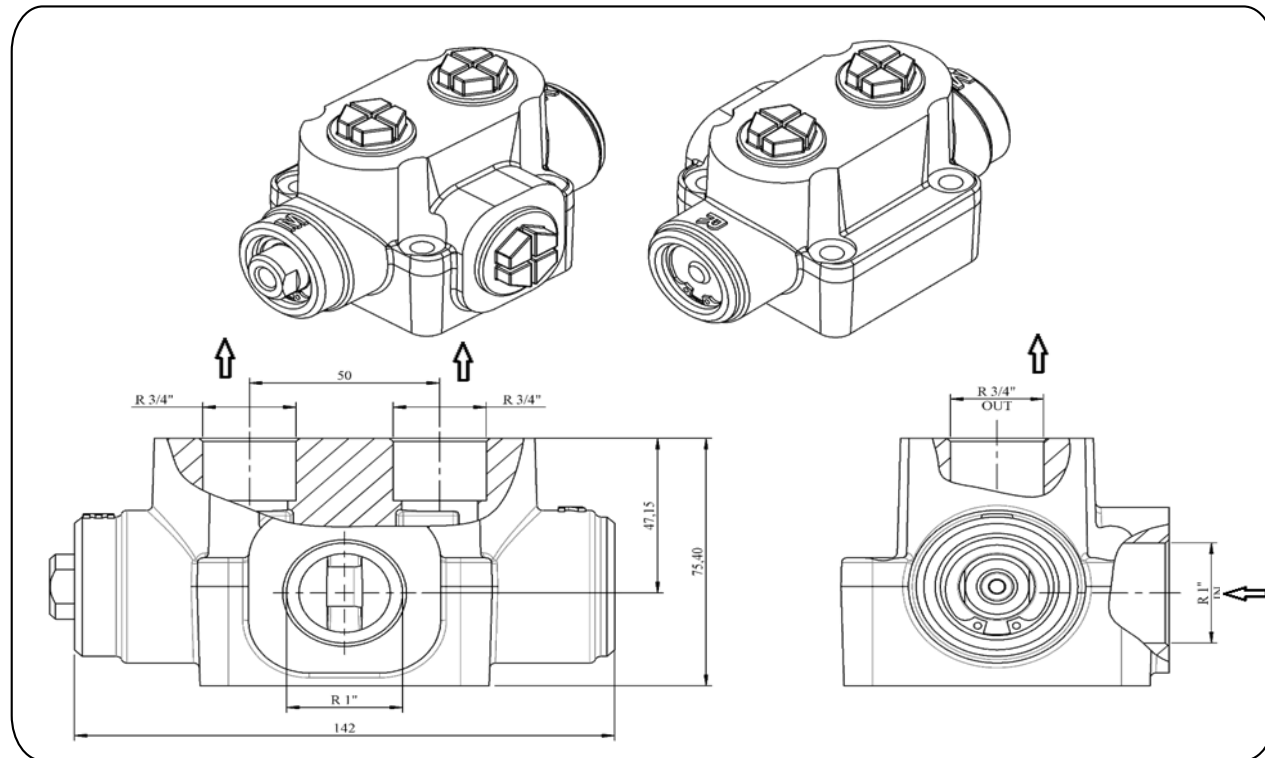


SPECIFICATIONS	
Pump Connection	R 1"
1. Cylinder Connection	R 3/4"
2. Cylinder Connection	R 3/4"
Working Pressure	300 bar
Max. Intermittent Pressure	330 bar
Max. Peak Pressure	400 bar
Max. Flow	250 l/min
Oil Temperature Range	-20 & 80 °C
Weight	2,8 kg

FUNCTIONAL DIAGRAM

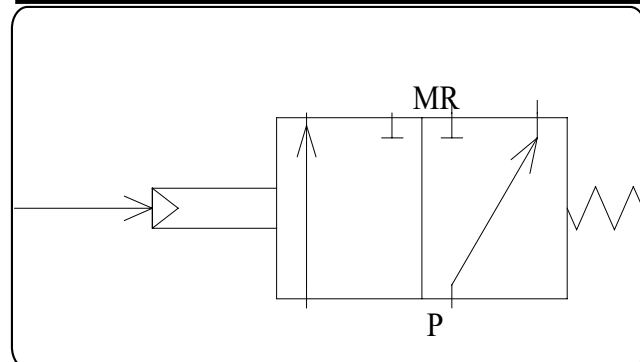


140 Lt End-Of-Stroke Valve

GKV-02

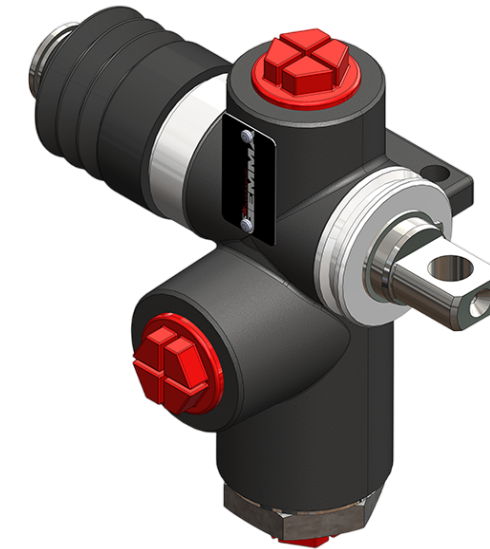

VALVES
VENTİLLER

HYDRAULIC EQUIPMENT
HİDROLİK EKİPMANLAR


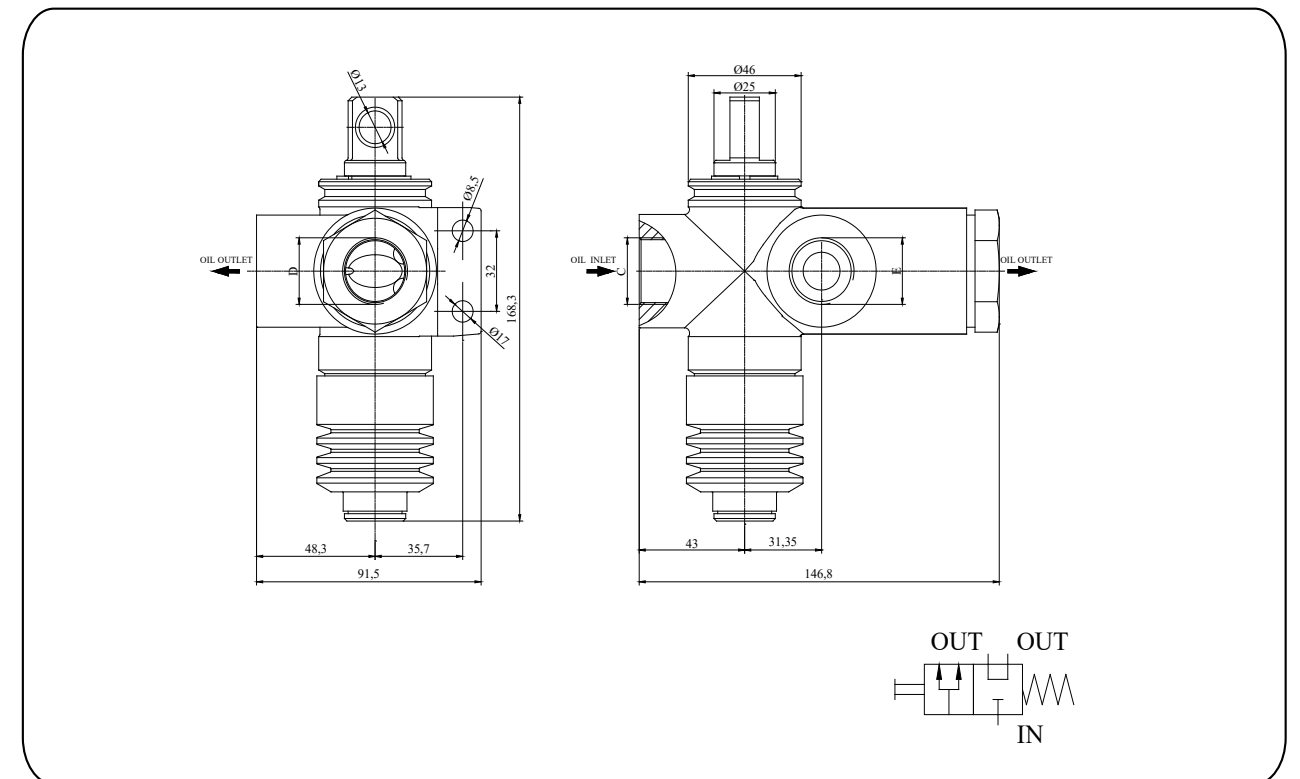


SPECIFICATIONS	
Oil input - C	R 3/4"
Oil outlet - D	R 3/4"
Oil outlet - E	R 3/4"
Max. working pressure	190 bar
Max. Flow	140 L/dak
Oil temperature range	-20 & 80 °C
Weight	2,5 kg




140 Lt Distributor Valve 3 Bolt - 190 Bar

36001060

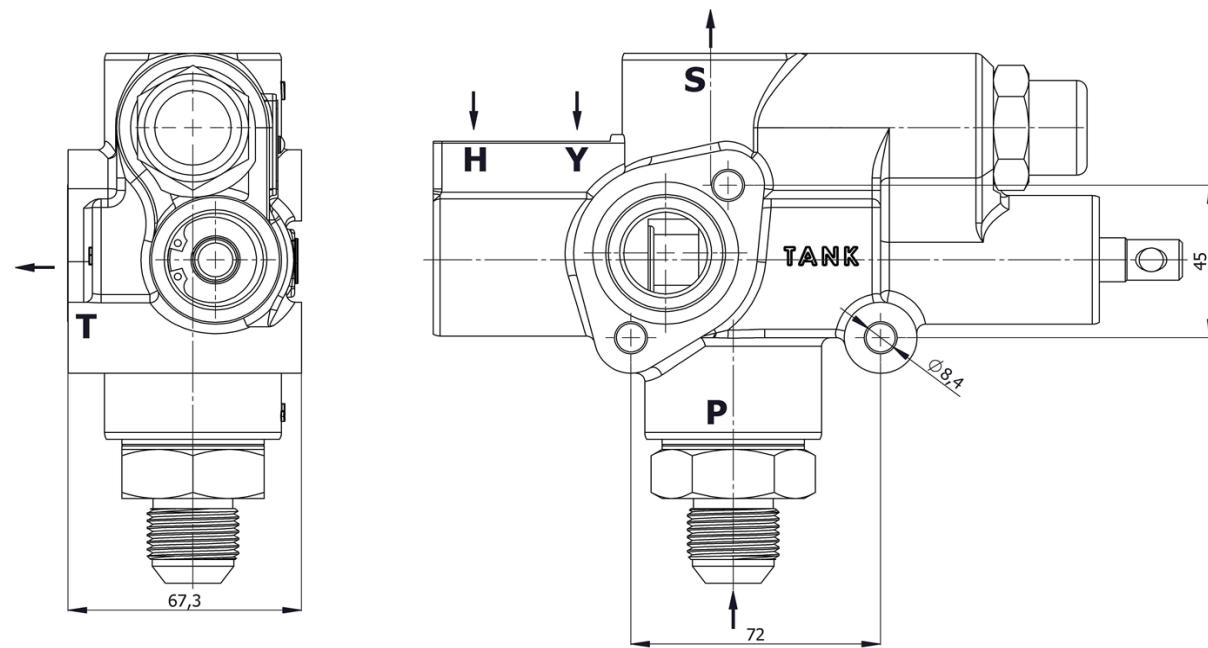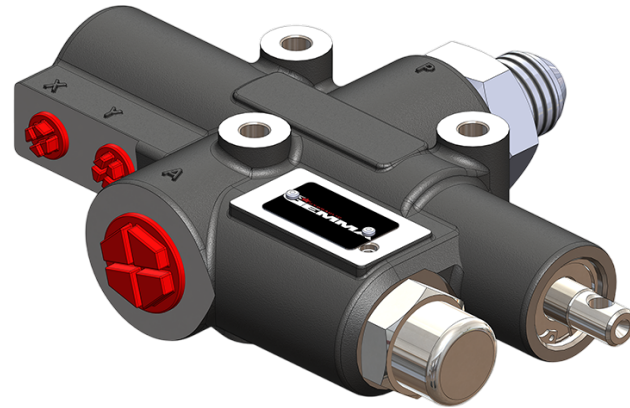



FUNCTIONAL DIAGRAM

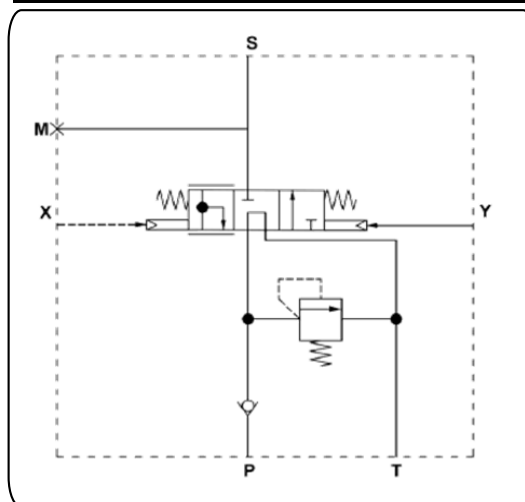

SPECIFICATIONS	
Cylinder connection	R 3/4"
Pump connection	R 3/4"
Tank connection	R 3/4"
Fast lower	R 1/4"
Slow lower	R 1/4"
Max.working pressure	190 bar
Max. Flow	140 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	4,15 kg


180 Lt Fixed Pressure Distributor Valve - 190 bar

360035190

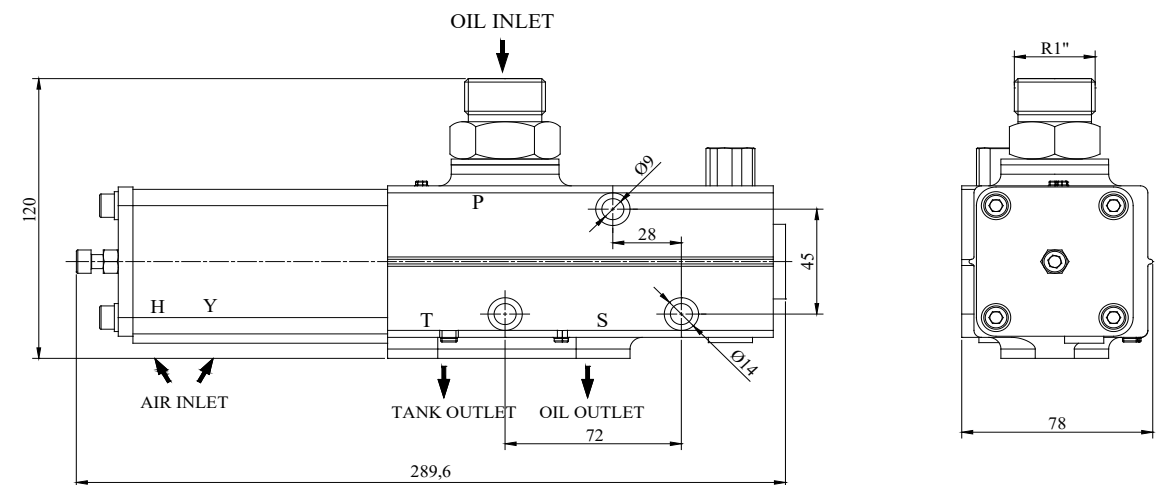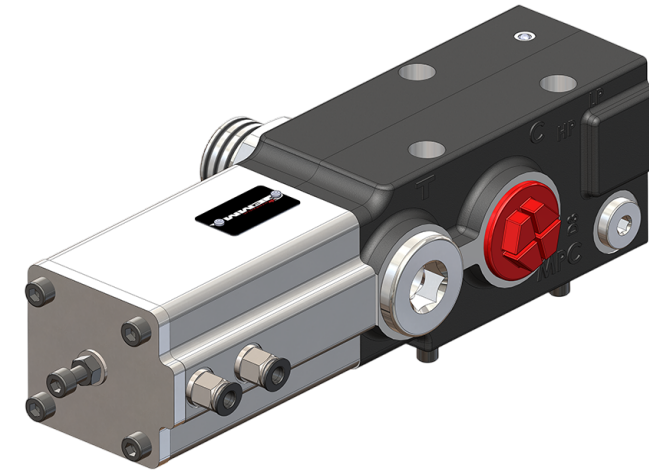

SPECIFICATIONS



SPECIFICATIONS	
Cylinder connection	R 1"
Pump connection	R 1"
Tank connection	R 1"
Fast lower	R 1/8"
Slow lower	R 1/8"
Max.working pressure	220 bar
Max. Flow	140 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	6,5 kg

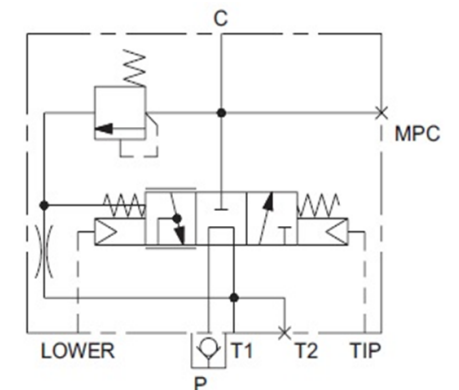





140 Lt Distributor Valve 4 Bolt - 190 bar

36001030

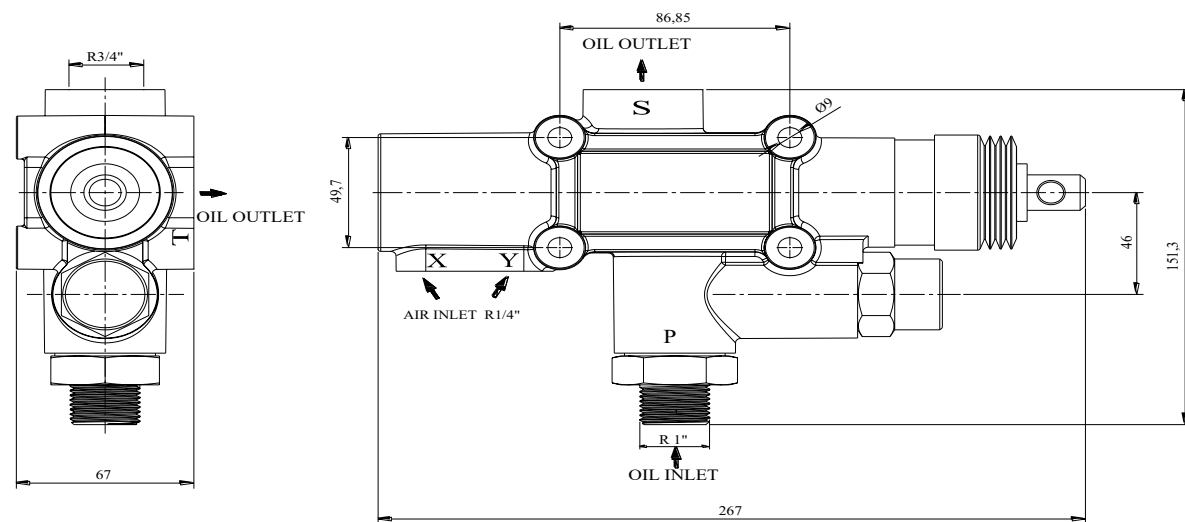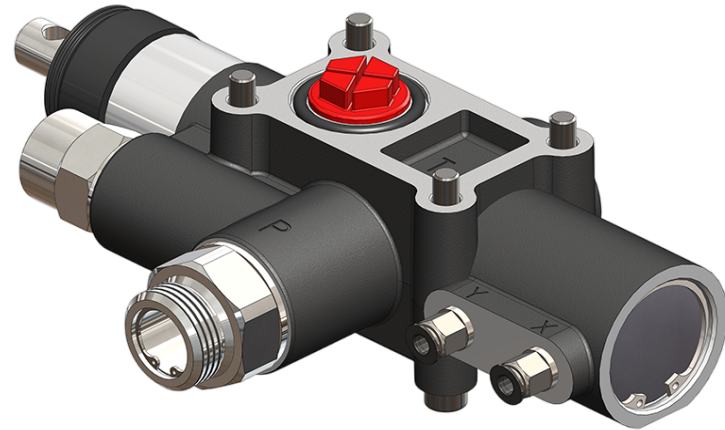


150 Lt Fixed Pressure Diverter Valve - 190 bar


360034190

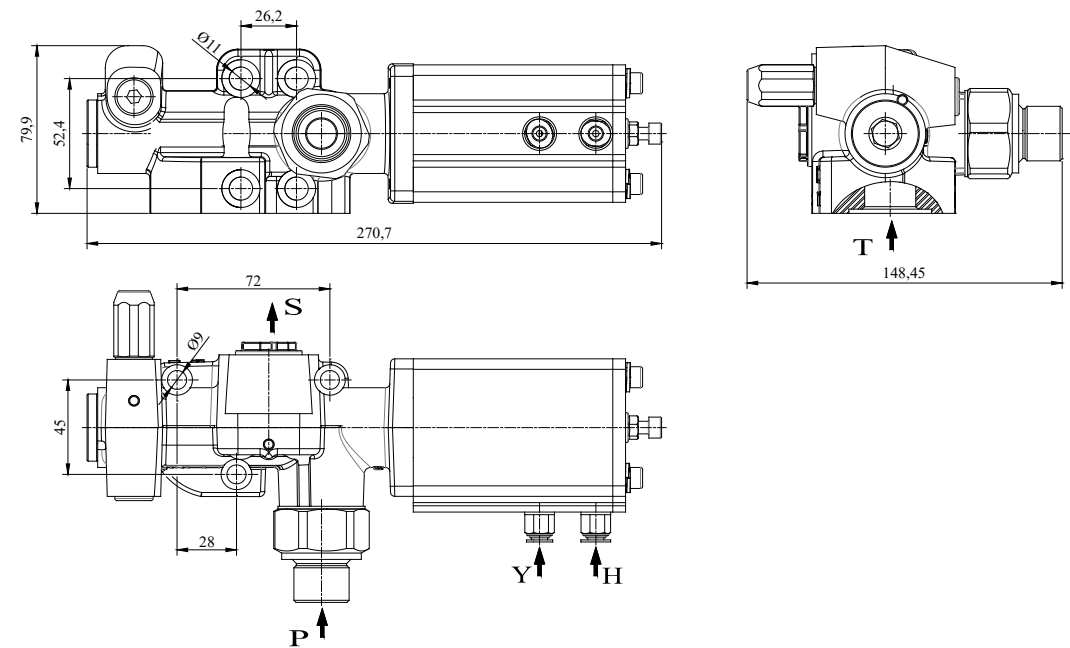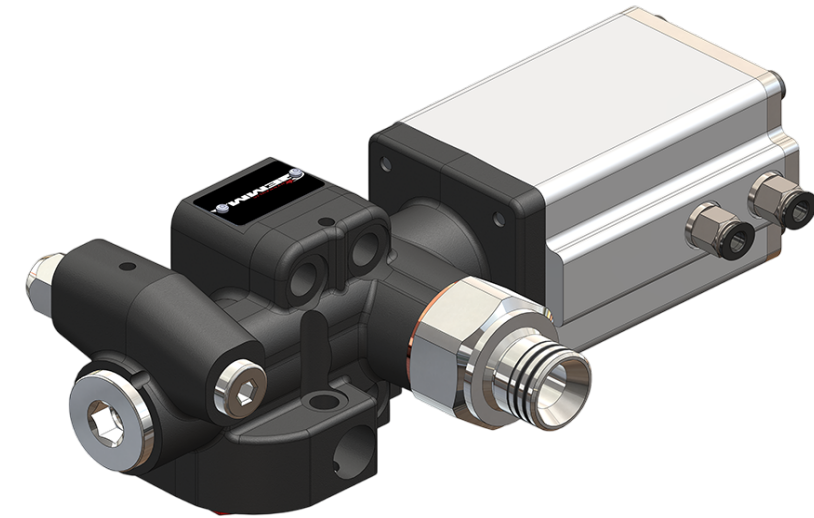

SPECIFICATIONS	
Cylinder connection	R 3/4"
Pump connection	R 1"
Tank connection	R 3/4"
Cylinder lowering	R 1/4"
Cylinder tipping	R 1/4"
Max.working pressure	190 bar
Max. Flow	140 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	4,6 kg

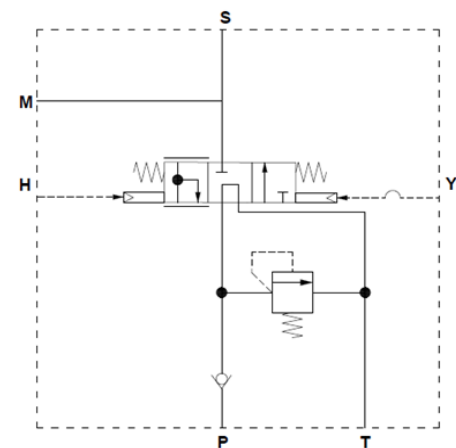



SPECIFICATIONS	
Cylinder connection	R 3/4"
Pump connection	R 3/4"
Tank connection	R 3/4"
Cylinder lowering	R 1/8"
Cylinder tipping	R 1/8"
Max.working pressure	190 bar
Max. Flow	150 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	4 kg

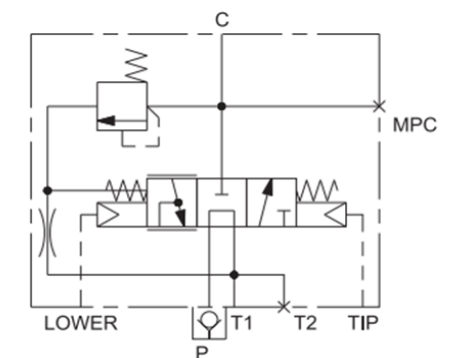




150 Lt Fixed Pressure Diverter Valve - 220 bar

360034220

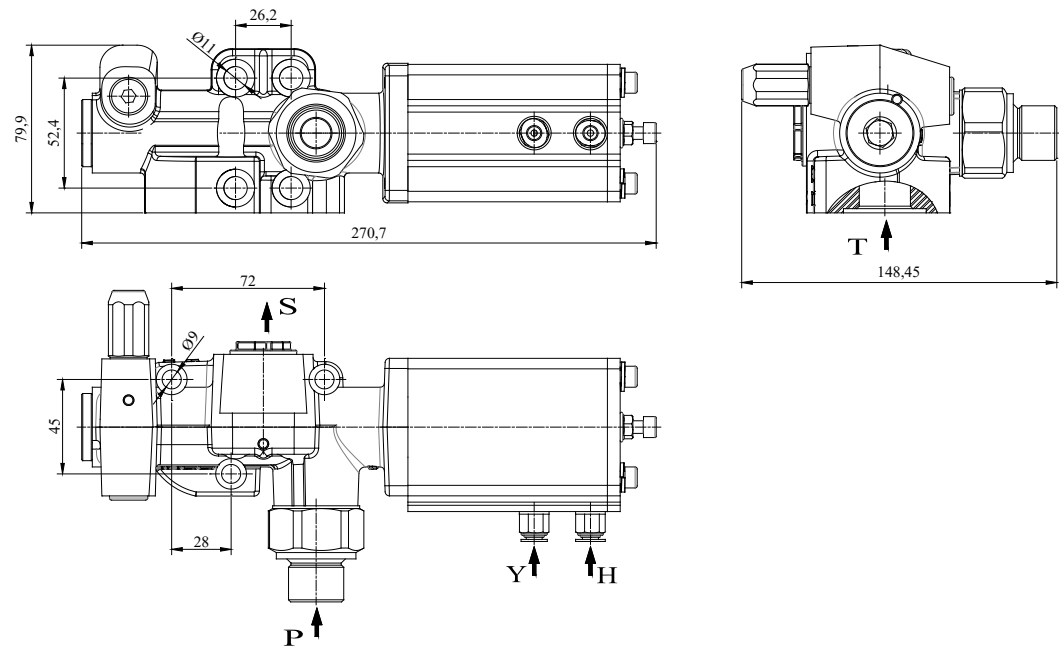
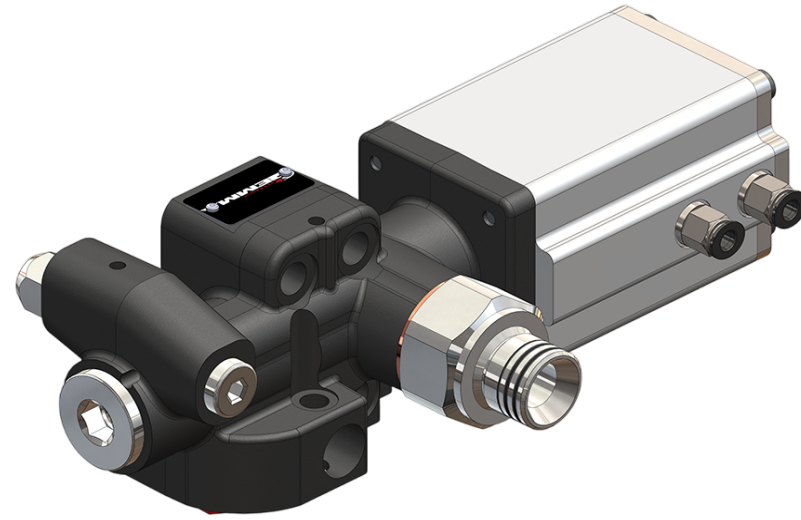


SPECIFICATIONS	
Cylinder connection	R 3/4"
Pump connection	R 3/4"
Tank connection	R 3/4"
Cylinder lowering	R 1/8"
Cylinder tipping	R 1/8"
Max.working pressure	220 bar
Max. Flow	150 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	4 kg

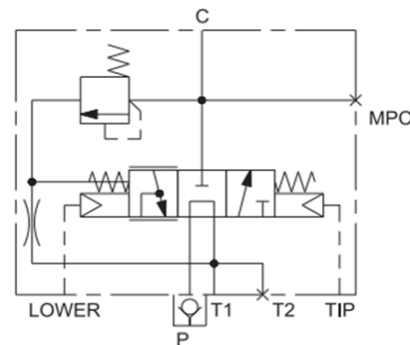


150 Lt Fixed Pressure Diverter Valve - 250 bar

360034250

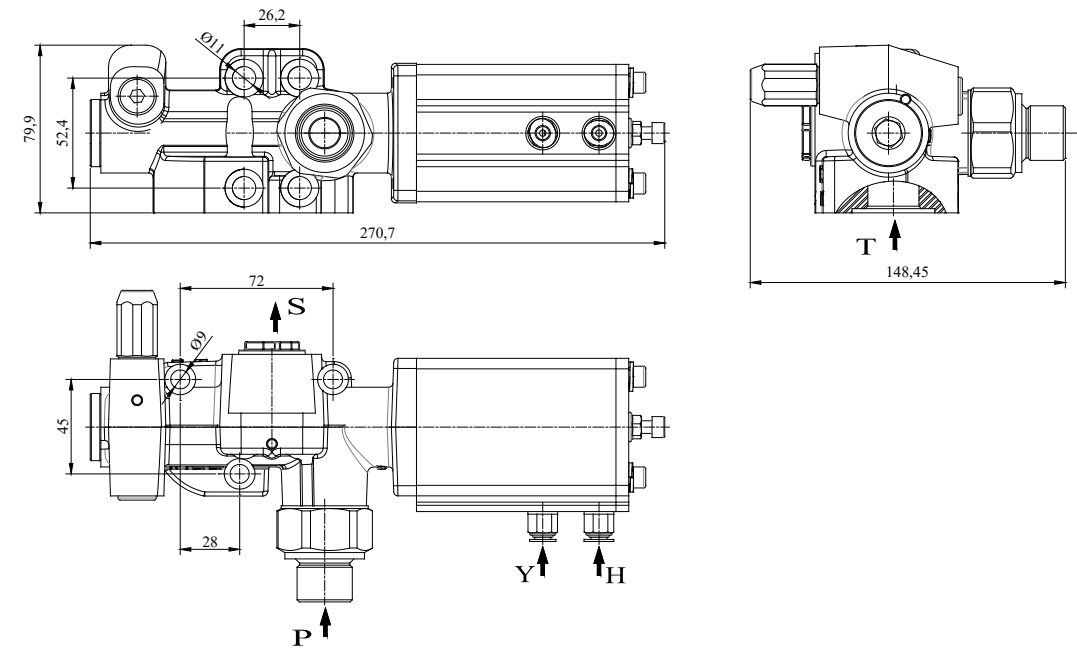
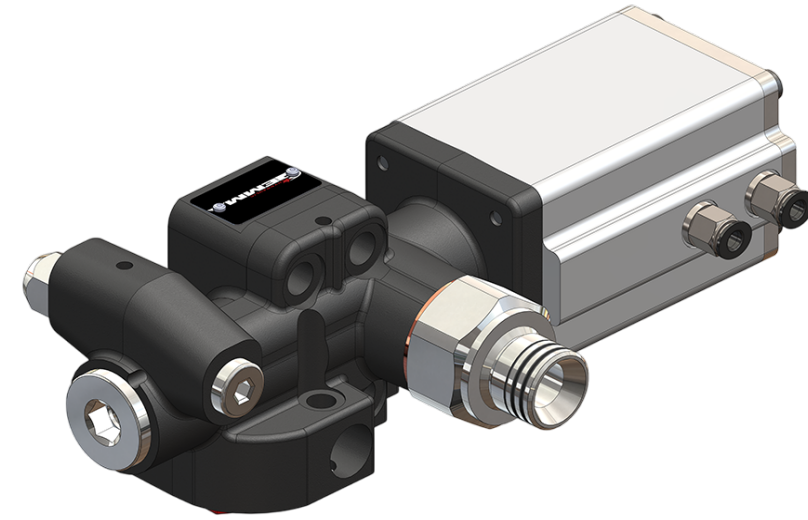


SPECIFICATIONS	
Cylinder connection	R 3/4"
Pump connection	R 3/4"
Tank connection	R 3/4"
Cylinder lowering	R 1/8"
Cylinder tipping	R 1/8"
Max.working pressure	250 bar
Max. Flow	150 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	4 kg

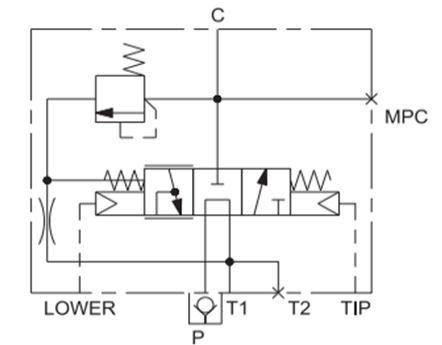


180 LT FIXED PRESSURE DISTRIBUTOR VALVE 220 Bar

360035220

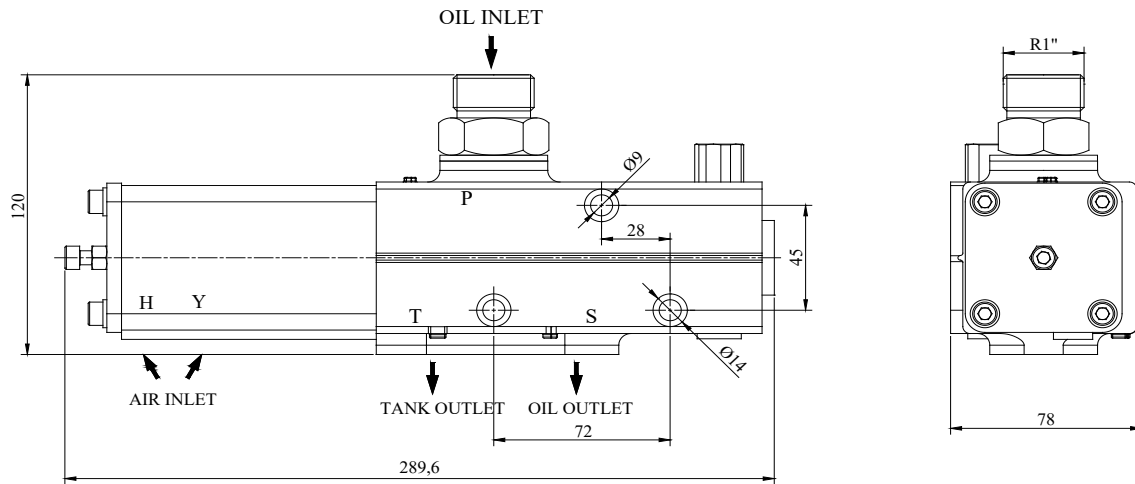
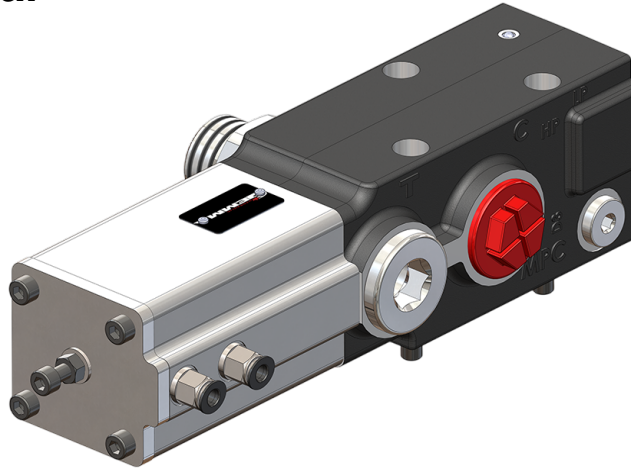


SPECIFICATIONS	
Cylinder connection	R 1"
Pump connection	R 1"
Tank connection	R 1"
Fast lower	R 1/8"
Slow lower	R 1/8"
Max.working pressure	220 bar
Max. Flow	220 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	6,5 kg

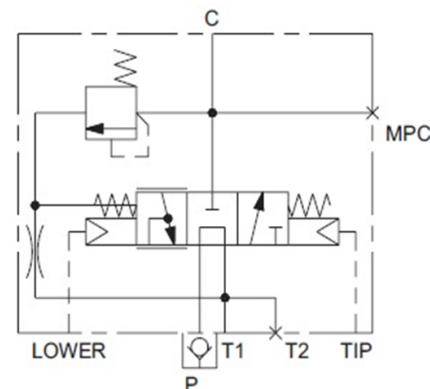


180 LT FIXED PRESSURE DISTRIBUTOR VALVE 250 Bar

360035250

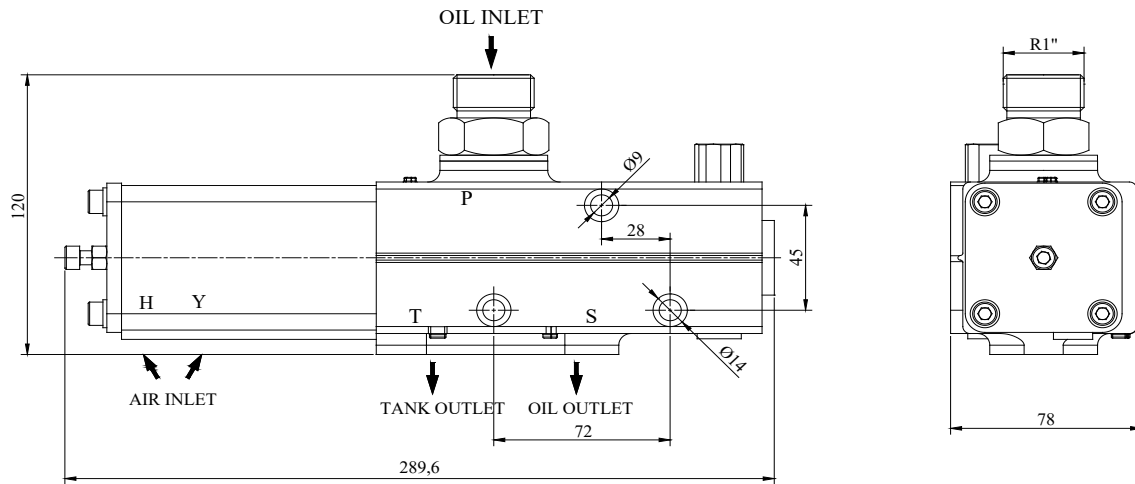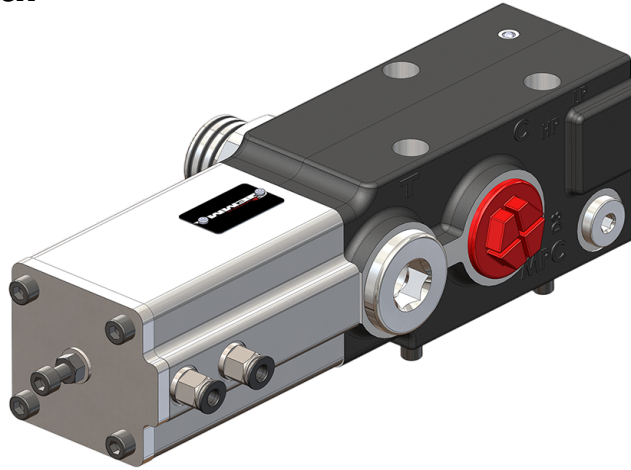

SPECIFICATIONS	
Cylinder connection	R 1"
Pump connection	R 1"
Tank connection	R 1"
Fast lower	R 1/8"
Slow lower	R 1/8"
Max.working pressure	250 bar
Max. Flow	220 L/dak
Oil Temperature Range	-20 & 80 °C
Weight	6,5 kg

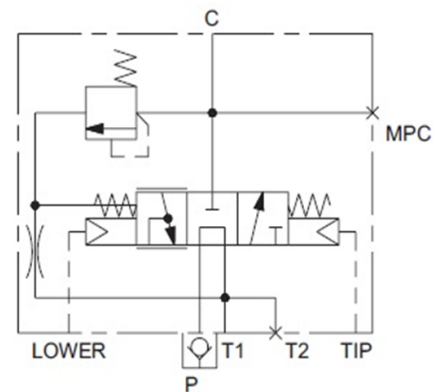

DIRECTION VALVE TANK TYPE (3/4" - 1")



BAR AYAR SOMUNU
3/4"x14



Hava Girişi R1/4"x19
Air Inlet R1/4"x19

Hava Girişi R1/4"x19
Air Inlet R1/4"x19

36001020, 36001021

RAKOR R3/4"x14

Ø11,50mm(2x)

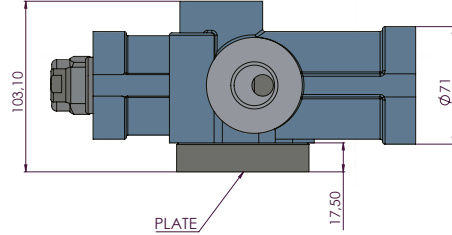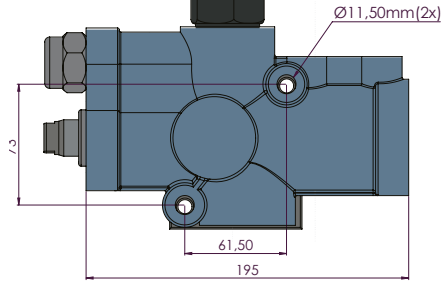

DISPLACEMENT DEBİ (Lt/min)	Max. Pressure Maksimum Basınç	Hydraulic Bağlantı "B" Hydraulic Connections
140	190	G3/4"
140	190	G1"

DIRECTION VALVE (3/4" - 1")

YÖN VENTİLİ



BAR AYAR SOMUNU
3/4"x14

Hava Girişi R1/4"x19
Air Inlet R1/4"x19



Hava Girişi R1/4"x19
Air Inlet R1/4"x19

36001010, 36001011

RAKOR R3/4"x14

R3/4"x14


Ø11,50mm(2x)

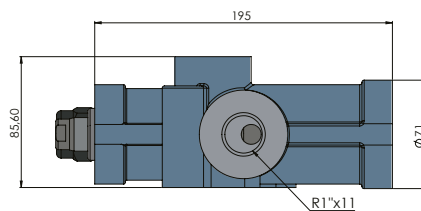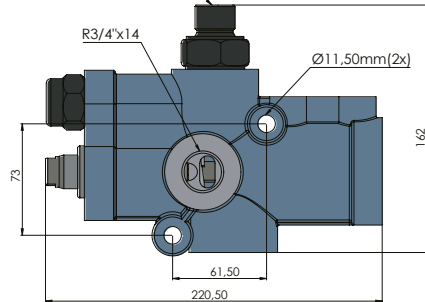




DISPLACEMENT DEBİ (Lt/min)	Max. Pressure Maksimum Basınç	Hydraulic Bağlantı "B" Hydraulic Connections
140	190	G3/4"
140	190	G1"

OPEN-LOOP LIMIT CONTROL VALVE (3/4"-1")

SINIR KONTROL VALFİ AÇIK (3/4"-1")

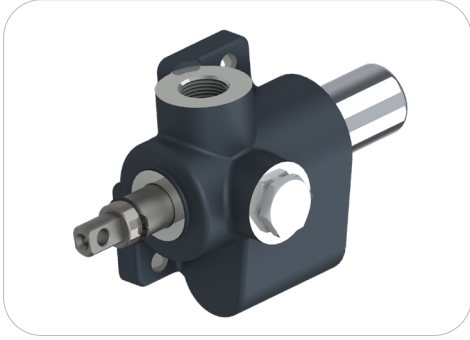

36001520, 36001521

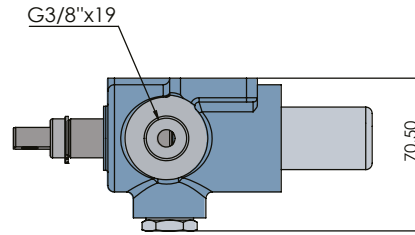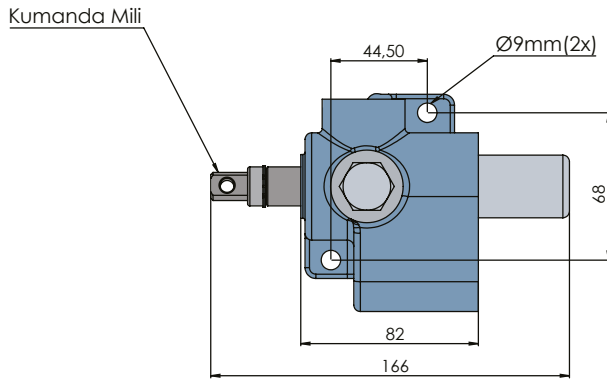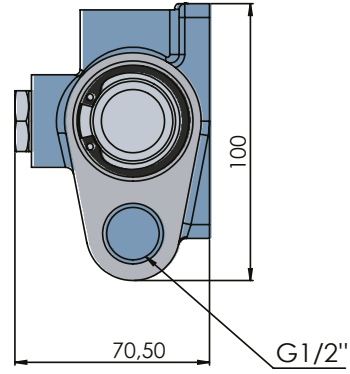

VALVES
VENTİLLER

HYDRAULIC EQUIPMENT
HİDROLİK EKİPMANLAR

CLOSED-LOOP LIMIT CONTROL VALVE (3/4"-1")

SINIR KONTROL VALFİ KAPALI (3/4"-1")



36001510, 36001511

Ø10,50mm(2x)

