



TECHNICAL DATA

TEKNIK VERİLER




DUAL FLOW HIGH PRESSURE PISTON PUMP 53+53 / 56+26

ÇİFT ÇIKIŞLI YÜKSEK BASINÇ PİSTONLU POMPA 53+53 / 56+26




53+53 and 56+26 cc Options
High Pressure
High Efficiency
Long Life
Low Working Noise
For Use DIN mount PTO
Nickel Cover
Seal and Color Options
Parallel Working Operation

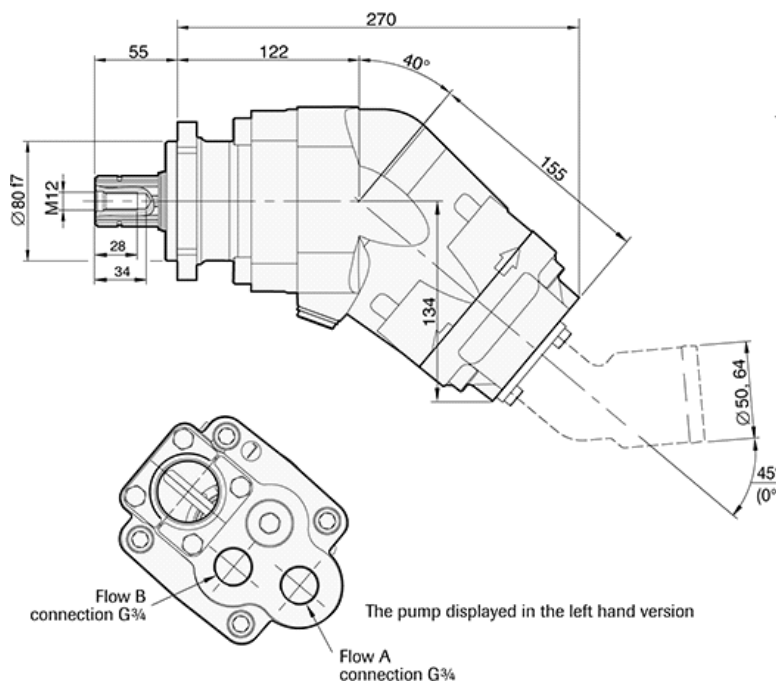

Spline shaft:
DIN 5462 / ISO 14
Mounting flange:
ISO 7653-D

PISTON PUMPS & MOTORS OVERAL EFFICIENCY CURVE

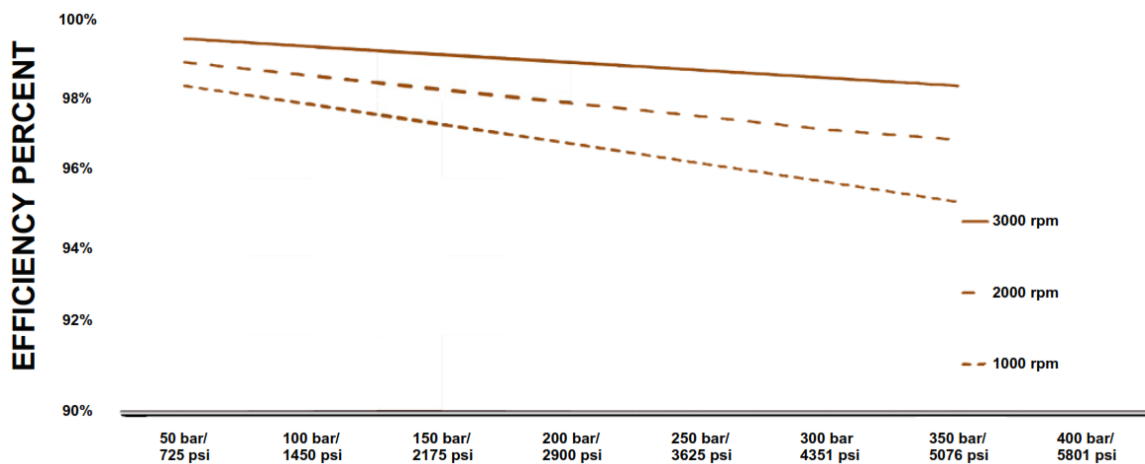

Pump Code	Displacement @1000 RPM	Max. Continuous Pressure (BAR)	Maximum Peak Pressure. (BAR)	Continuous Rotating Speed (RPM)	Max. Rotating Speed (RPM)	Overhang Torque (Nm)	Working Temperature Min/Max (°C)	Weight (KG)
35425353R	53+53	300	400	1900	2500	21	-35 / +90	18,00
35425353L								
35425626R	56+26	300	400	1900	2500	21	-35 / +90	18,00
35425626L								