

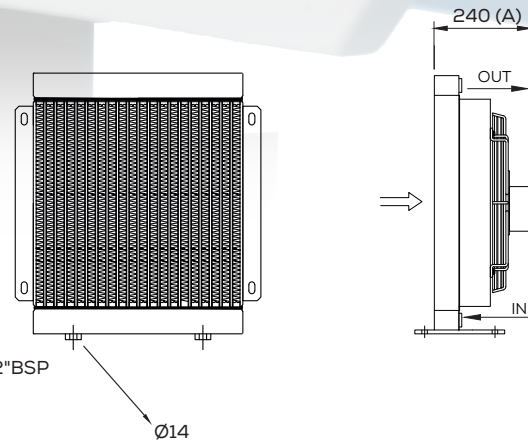
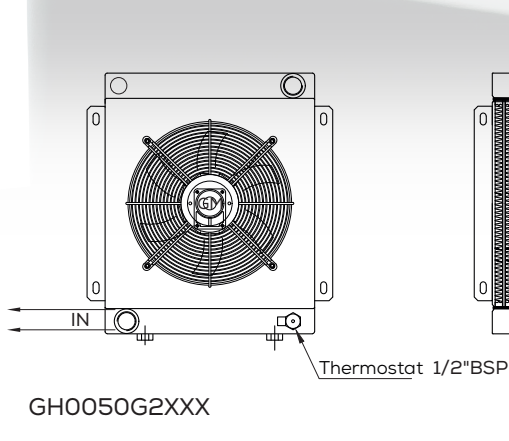
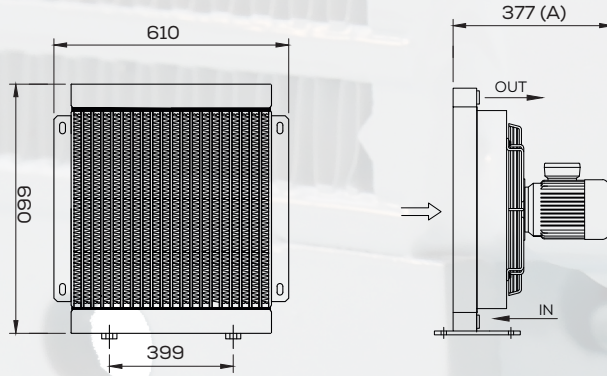
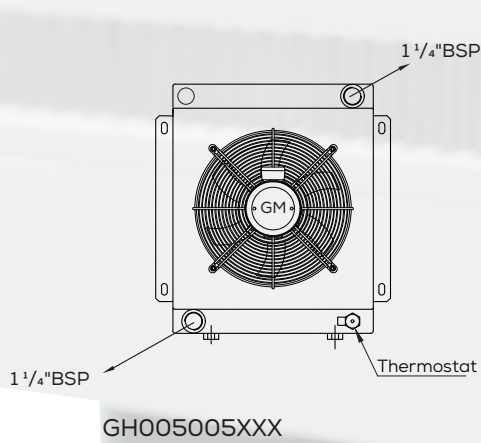
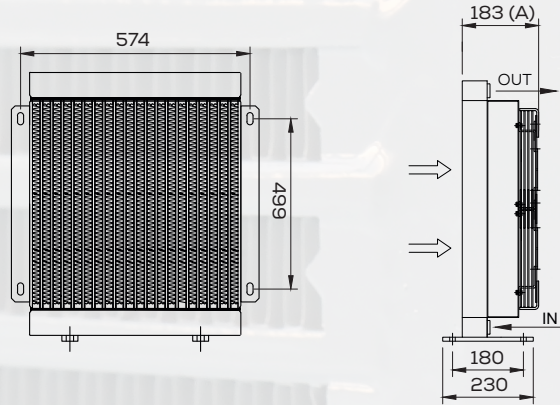
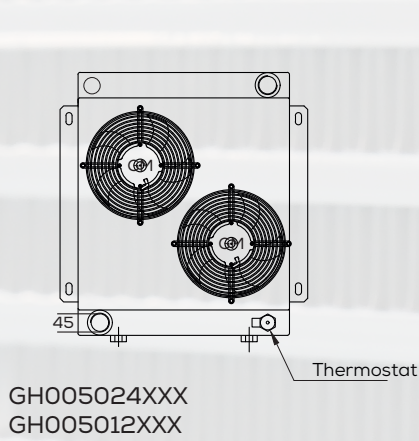
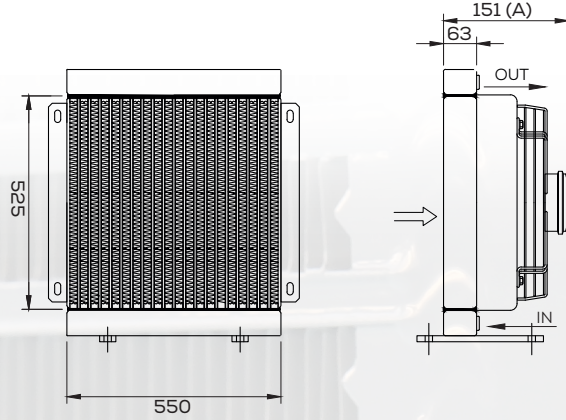


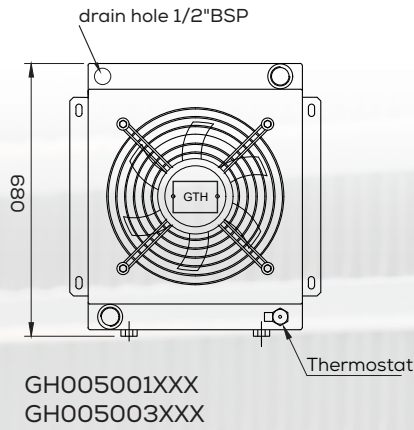


All data are non-binding. Gemma Hidrolik A.Ş. has the right to change it without prior notice. "A" dimension can be change (+/-10 mm)

GH0050	Fan ø	Voltage V	Frequency Hz	Current A	kW(W)	rpm	m³/h	dB(A)	IP
24	254x2	24V	/	5.0A	0.12	3200	900	60-70	68
12	254x2	12V	/	10.0A	0.12	3200	900	60-70	68
01	250x2	230	50	0.4A	0.9	2500	1360	60	54
03	250x2	380	50	0.3A	0.9	2500	1300	59	54
01 M	450	230	50	0.9A	0.205	1350	4350	67	54
03 M	450	380	50	0.55A	0.205	1350	4390	68	54
05	450	230-400 AC B14	50	2.0A	0.75	1410	4500	50	55
G2	Gemma Hidrolik ile görüşünüz. / Please Contact Gemma Hydraulic								

Performans Grafiği / Performance Diagram

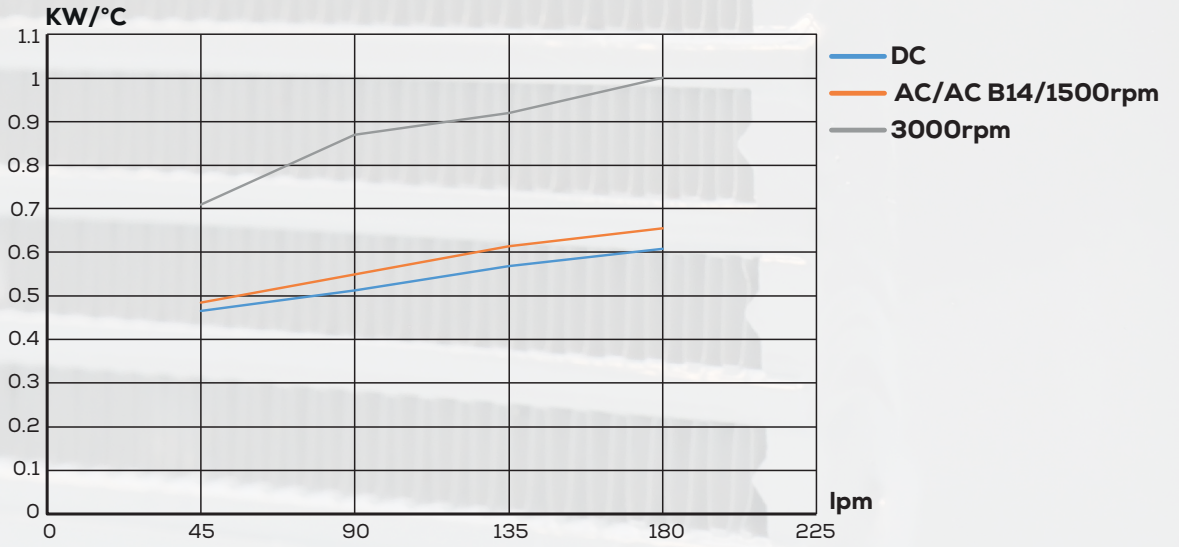

Basınç Düşümü / Pressure Drop

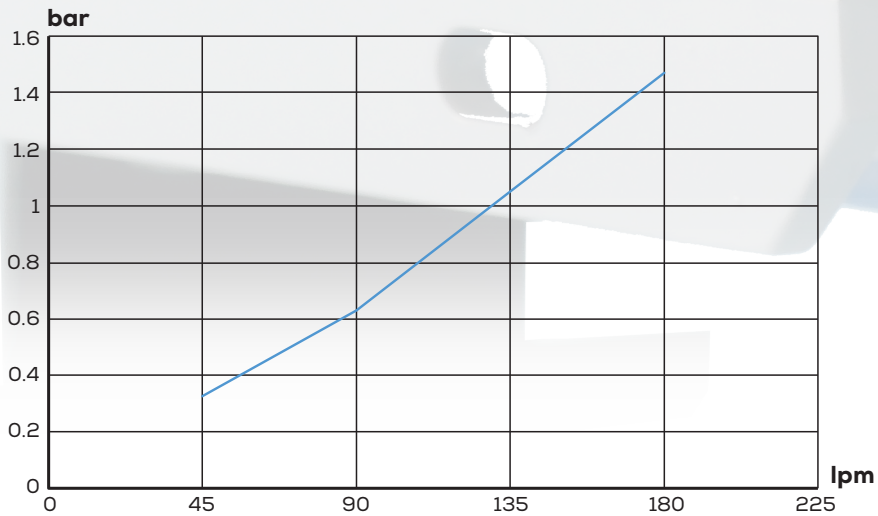

Düzeltilme faktörü -F- (basınç düşümü) / Correction Factor -F- (pressure drop)

cst	10	15	20	30	40	50	60	80	100	200	300
F	0,5	0,65	0,76	1	1,21	1,4	1,6	1,9	2,1	3,4	4,3

All data are non-binding. Gemma Hidrolik A.Ş. has the right to change it without prior notice. "A" dimension can be change (+10 mm)